

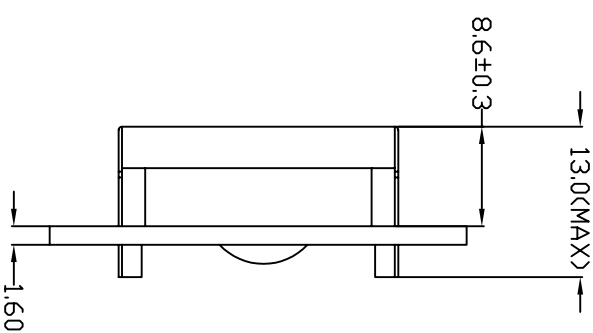


Customer approval :

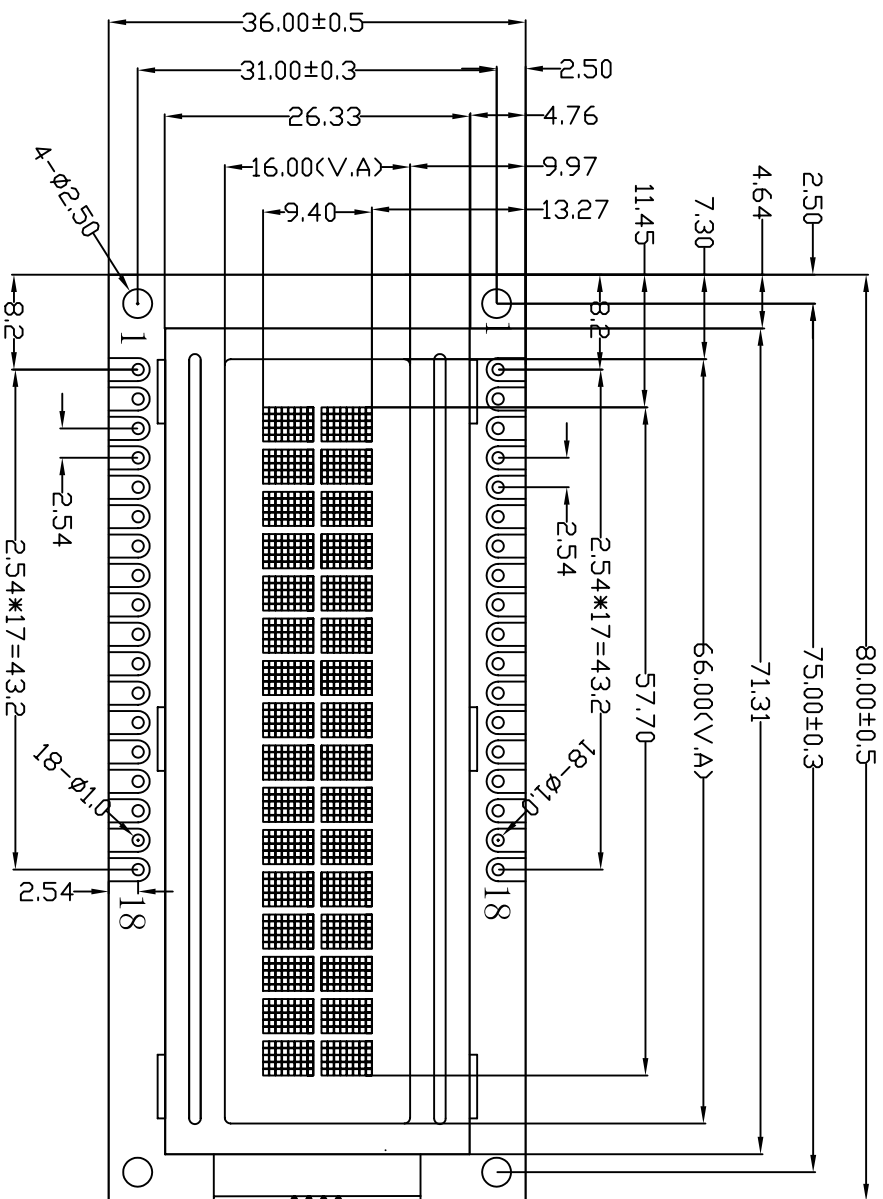

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.5V(Ref), VDD:5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Positive/Transflective/YG
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Controller IC:SPLC780
- 7). Backlight: Bottom ,YG
- 8). All the raw materials are RoHS compliant

PN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	VO	RS	RW	E	DB0	DB1	DB2	DB3
CONNECTION	DB4	DB5	DB6	DB7	LED-	A-RED	A-GREEN	A-BLUE		



深圳市三元晶科技有限公司  
ShenZhen TCC LCD Hi-Tech Co., Ltd

REV	REVISION RECORD	DATE
A0	First issue	11/15

MODEL NO.  
SYB1602A4V10

GENERAL TOL: ±0.3  
未注公差

APPROVED BY

PAGE: 1 OF 1  
UNIT: mm

CHECKED BY DRAWING BY PROJECTION 三角法