
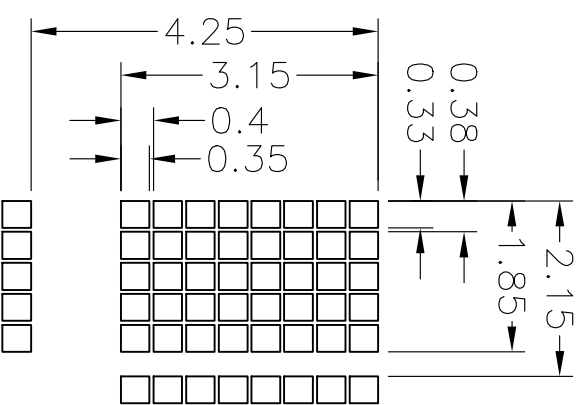
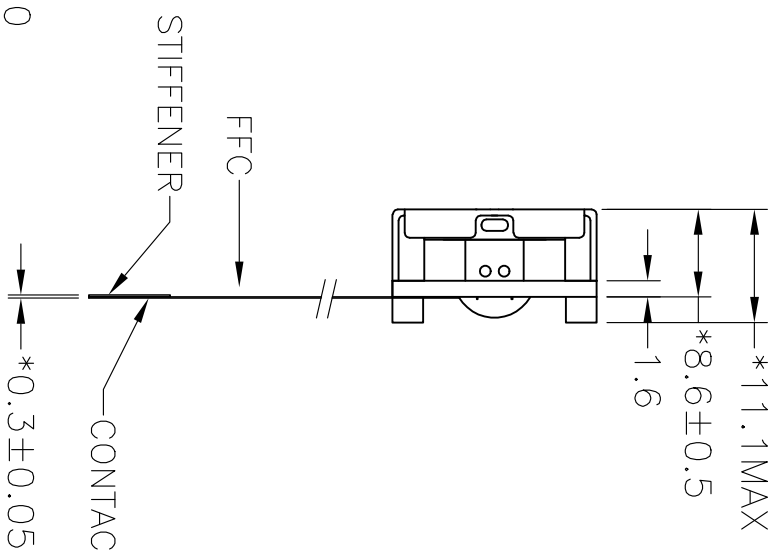


Customer approval :

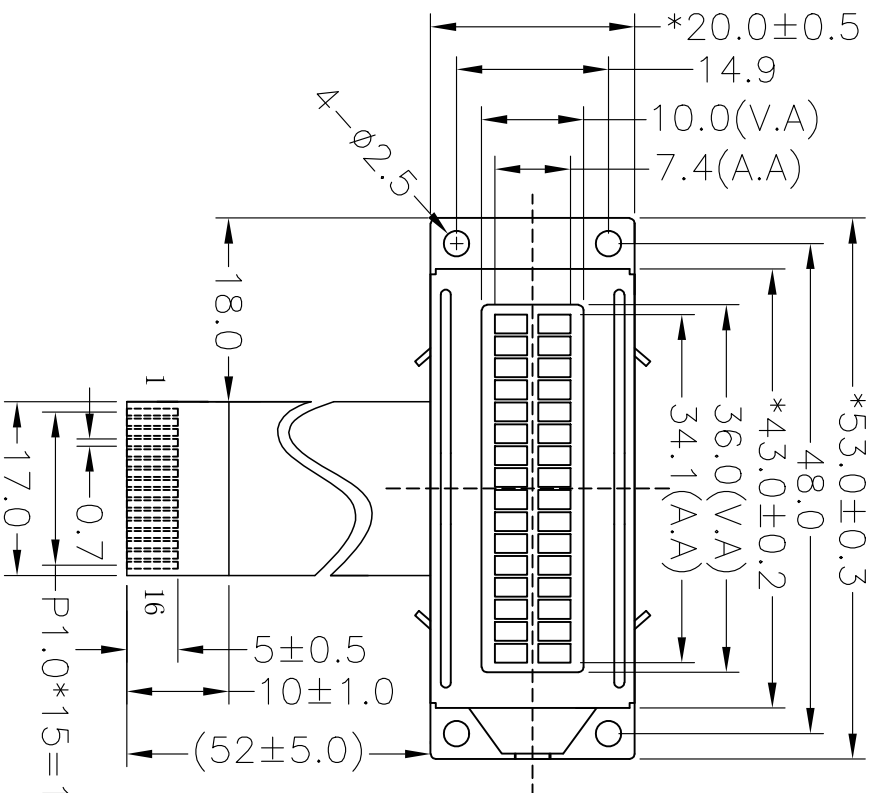

DOT SIZE  
SCALE 5:1

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	Vo	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:4.2V
  - 2). Viewing direction: 6 O'CLOCK
  - 3). Display mode: STN/Negative/Transmissive/Blue
  - 4). Operating temp.:0°C~+50°C
  - 5). Storage temp.: -10°C~+60°C
  - 6). Control IC: SPLC780D1(Or Compatible)
  - 7). Backlight: Edge,White
  - 8). Dimensions with mark "\*" are important with mark "(") are referenced
  - 9). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE	MODEL NO.		GENERAL TOL:
A	FIRST ISSUE	2010/09/16	SYB1602EV10-5C10BL-B5NGF		±0.3
B			APPROVED BY 审核	CHECKED BY 检查	
C			Liu	Francis	
D			2010/09/16	Luoxian	


**深圳市三元晶科技有限公司**  
 ShenZhen TCCLCD HI-Tech Co., Ltd.

PAGE: 1 OF 1  
 UNIT: mm  
 PROJECTION: 三角法