


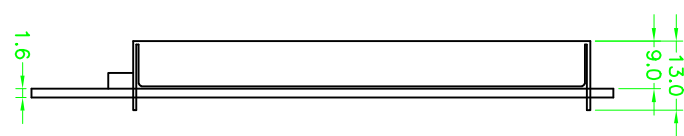



Customer approval :

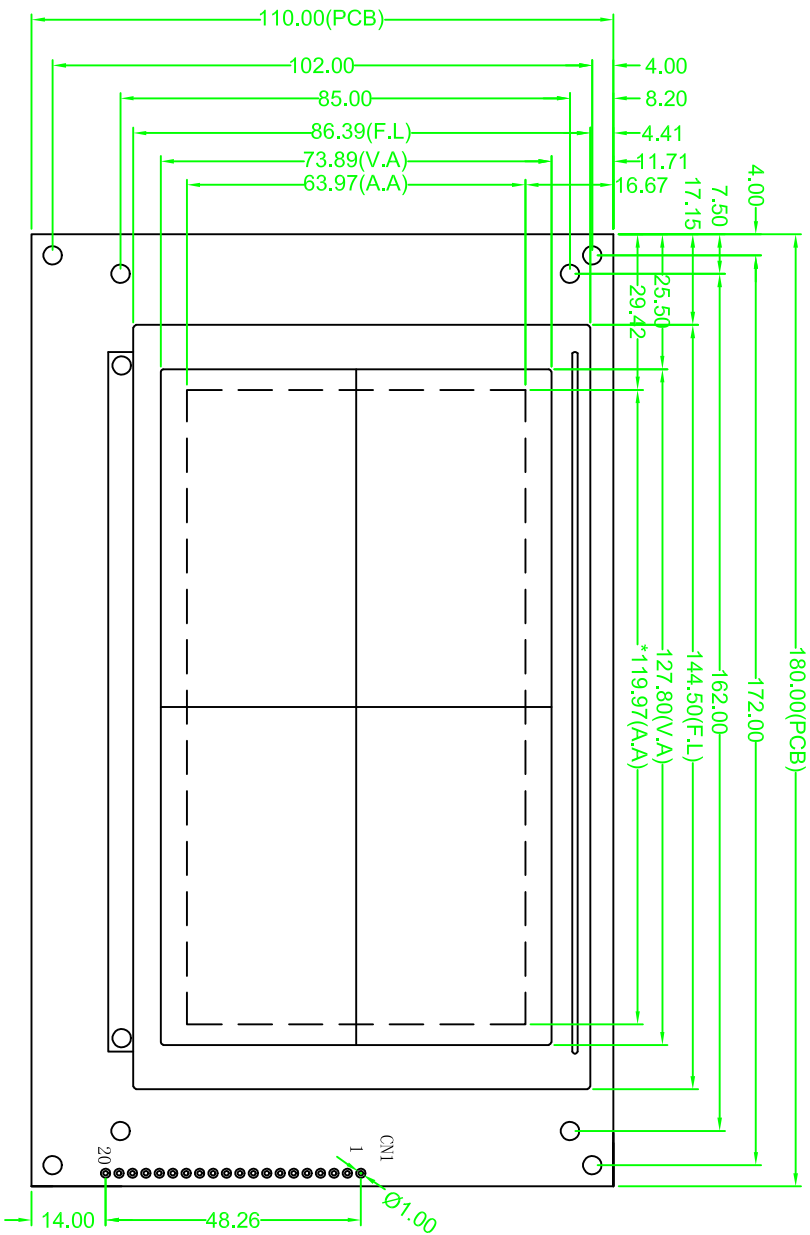

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION /RST	/RD	/MR	SEL2	SEL1	CS	A0	DB0	DB1	DB2	
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB3	DB4	DB5	DB6	DB7	VDD	VSS	V0	VOUT	FGND

- Specification:
- 1). Driving: Duty:1/128, Bias:1/12, Vout=-21.0V, V0=-18.0V, VDD=5.0V
  - 2). Viewing direction: 6 o'clock
  - 3). Display mode: FSTN/Negative/Transmissive
  - 4). Operating temp: -20°C~+70°C
  - 5). Storage temp: -30°C~+80°C
  - 6). Control IC: RA8835P3N(Or Compatible)
  - 7). Backlight: White array led: 5.0V
  - 8). dimensions with mark "\*" are important with mark "(") are referenced
  - 9). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE	深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd.				GENERAL TOL:
A	FIRST ISSUE	2015/11/03	MODEL NO. 模组型号	SYB240128F1V10-5C2K1M1-BSW1	CHECKED BY 检查	DRAWING BY 绘图	未注公差 ± 0.3
B			APPROVED BY 审核		Francis	Luoxian	PAGE: 1 OF 1
C			Liu	2015/11/03	2015/11/03	2015/11/03	UNIT: 单位mm
D							PROJECTION 三角法

